


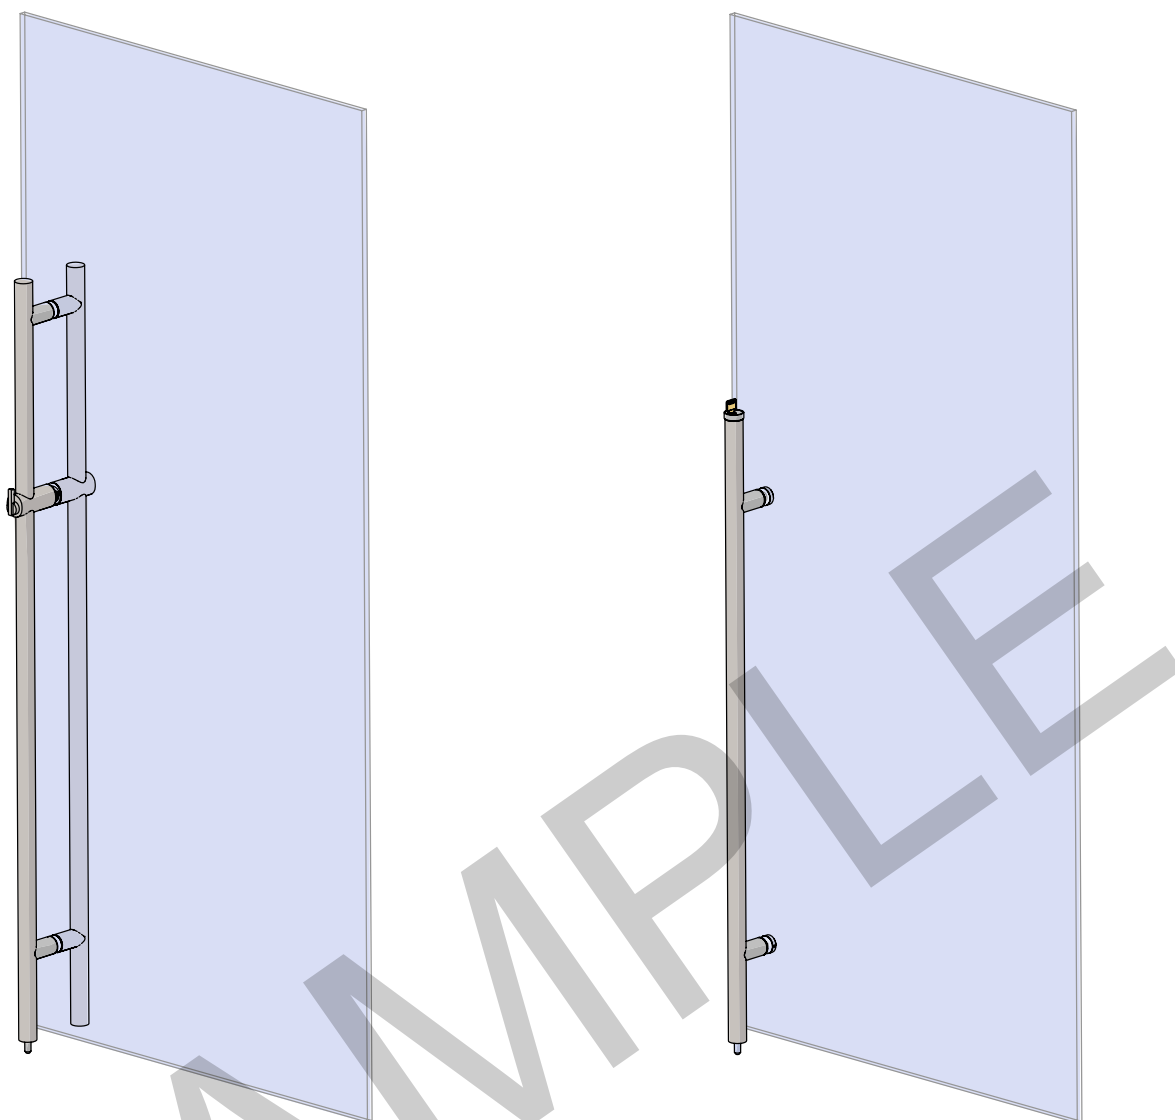

Locking Ladder Pulls

Back-to-back and Single-sided

Installation instructions


07-2018

2 Installation:

Back-to-back locking ladder pulls

2.1 Disassemble the pulls

Fig 1

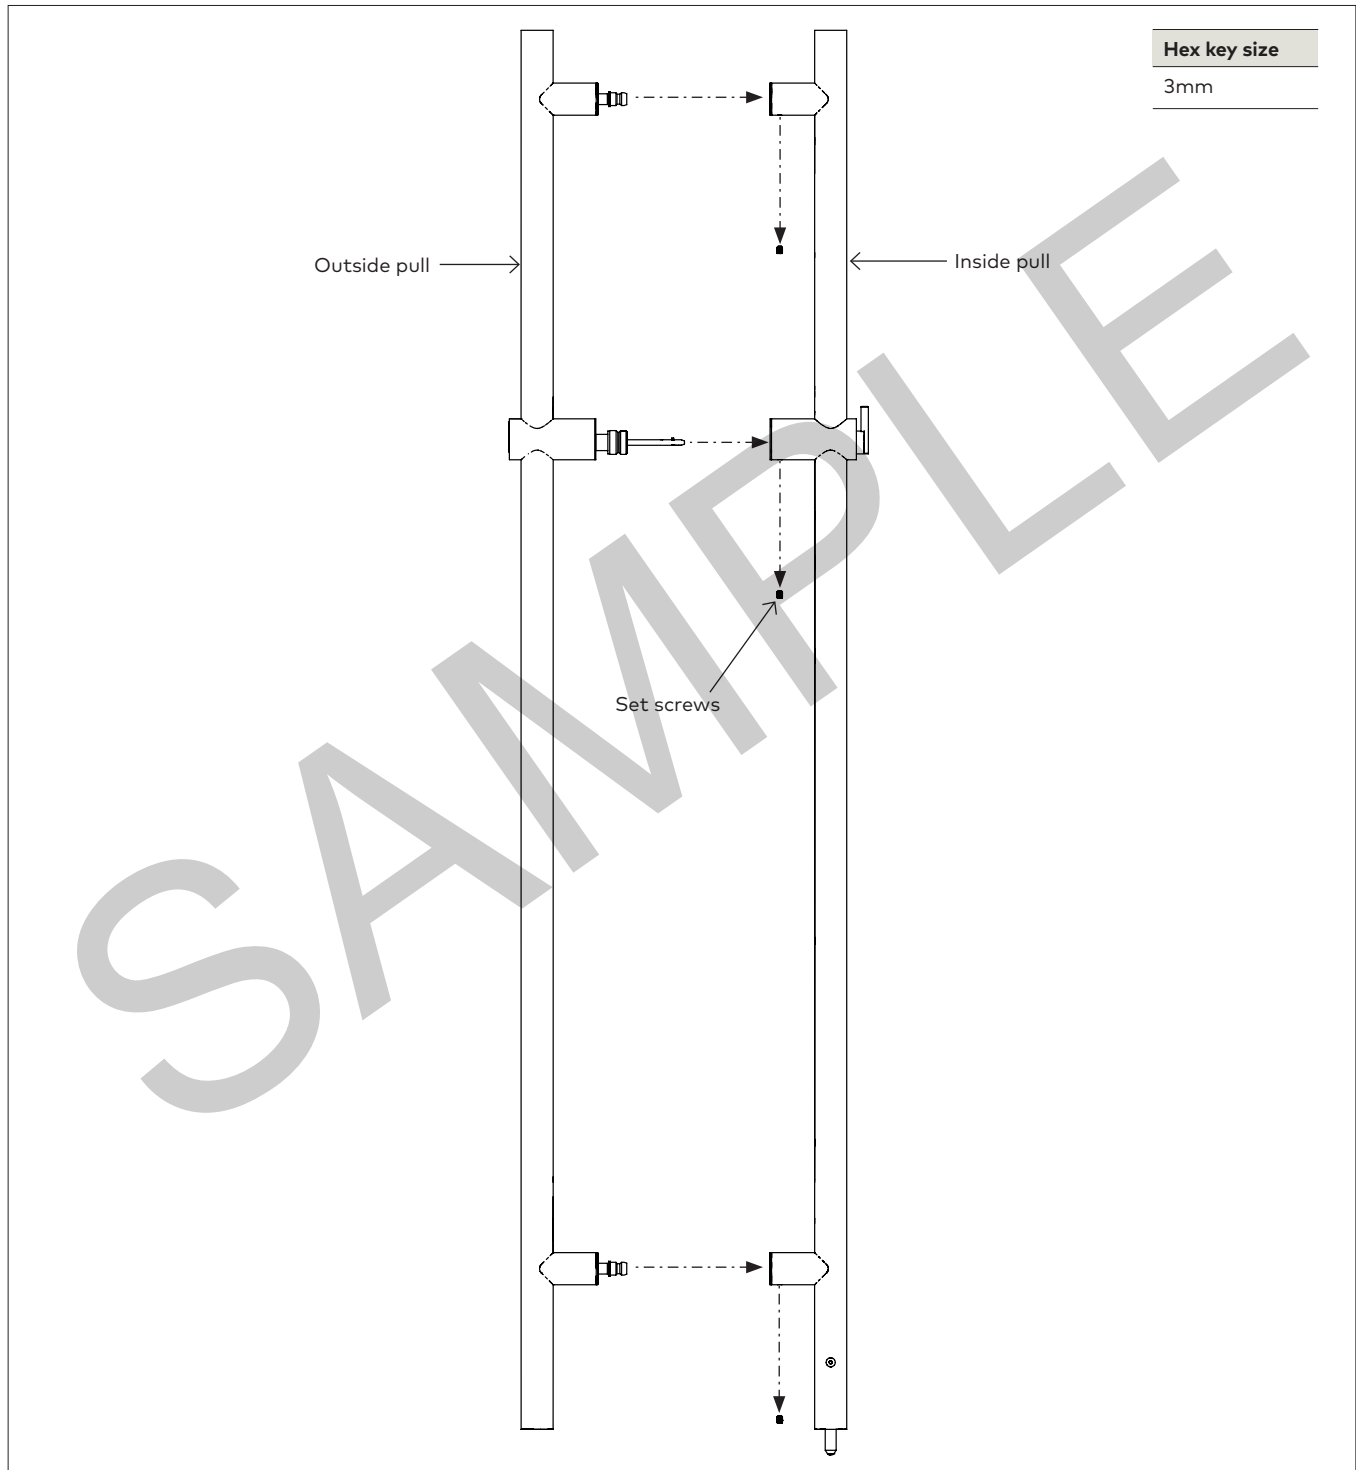


2.1.1 Disassemble pulls on flat surface.

- Loosen set screws in each stand off to separate pulls.

2.2 Disassemble all fasteners

Fig 2

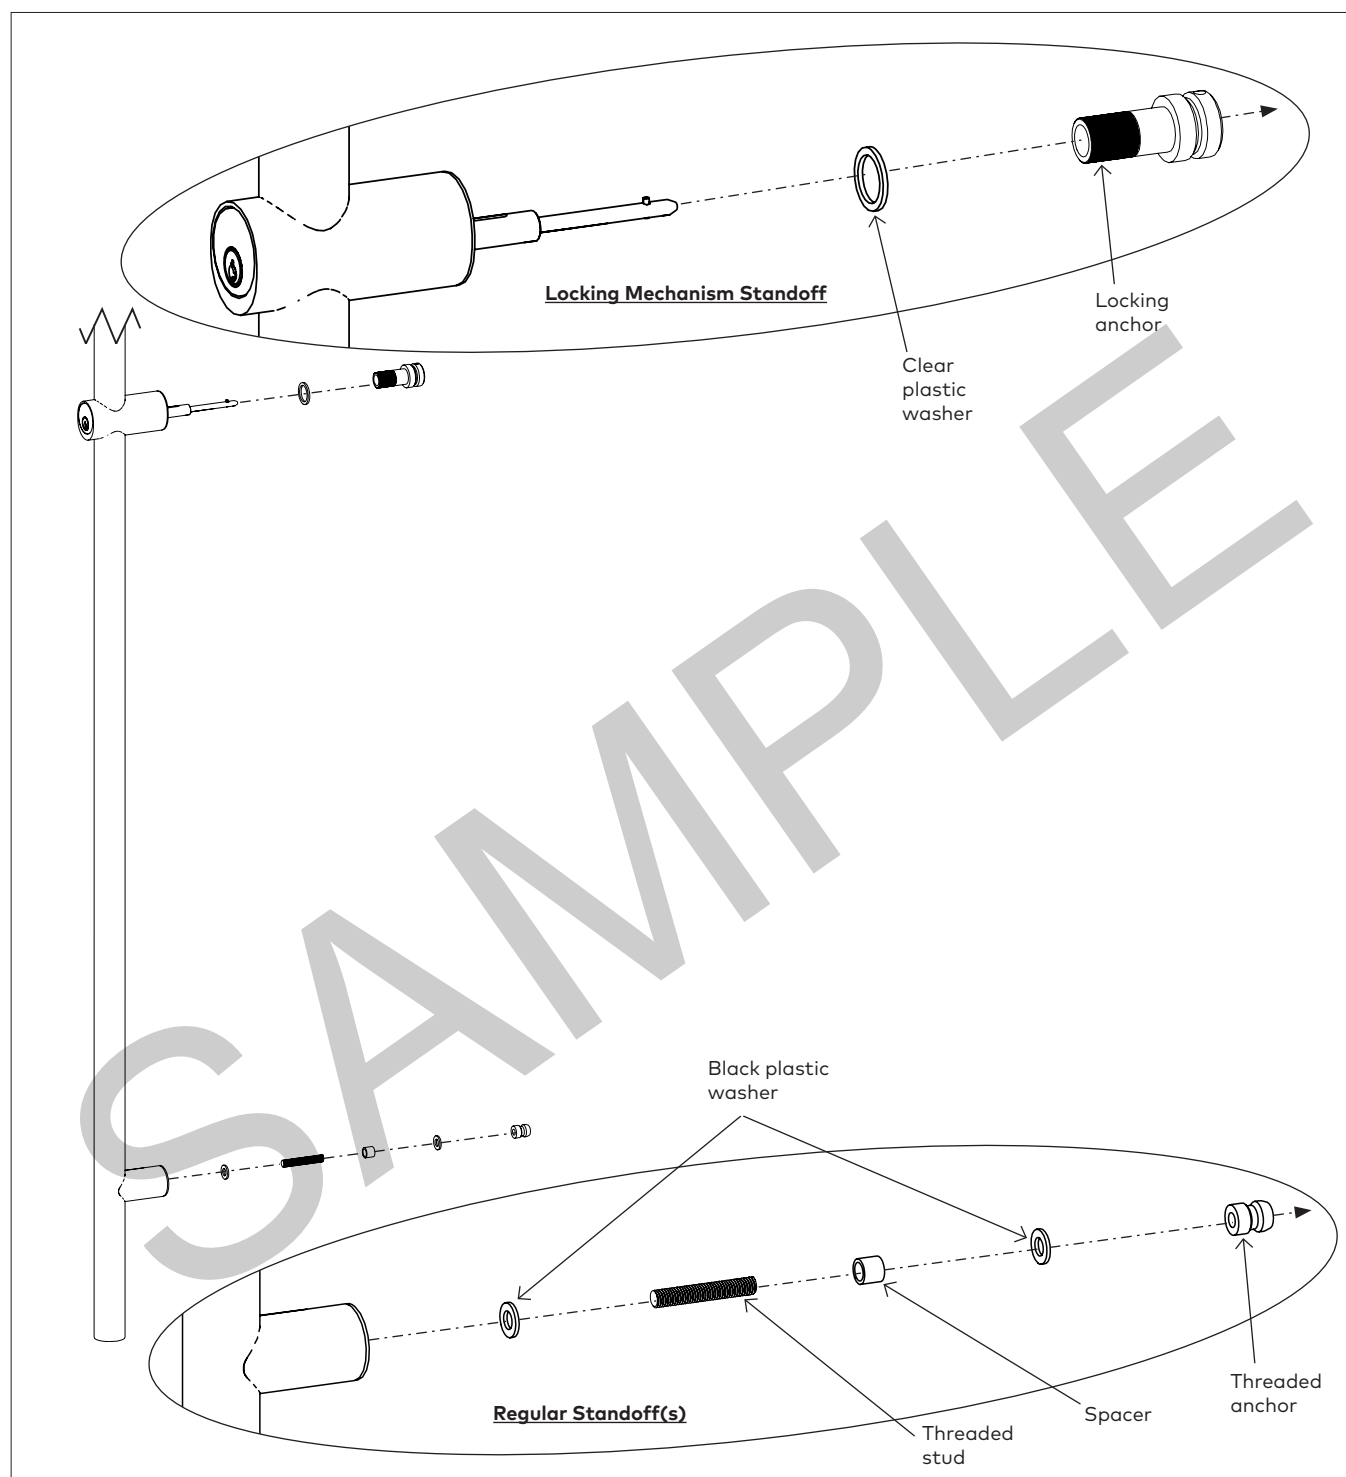

2.2.1 Unthread parts from **locking mechanism standoff**:


- Locking anchor
- Clear plastic washer

2.2.2 Unthread parts from **regular standoffs**:

- Threaded anchor
- Black plastic washers (qty: 2 per each regular standoff)
- Threaded stud
- Spacer

2.4 Install lock cylinder

Fig 4

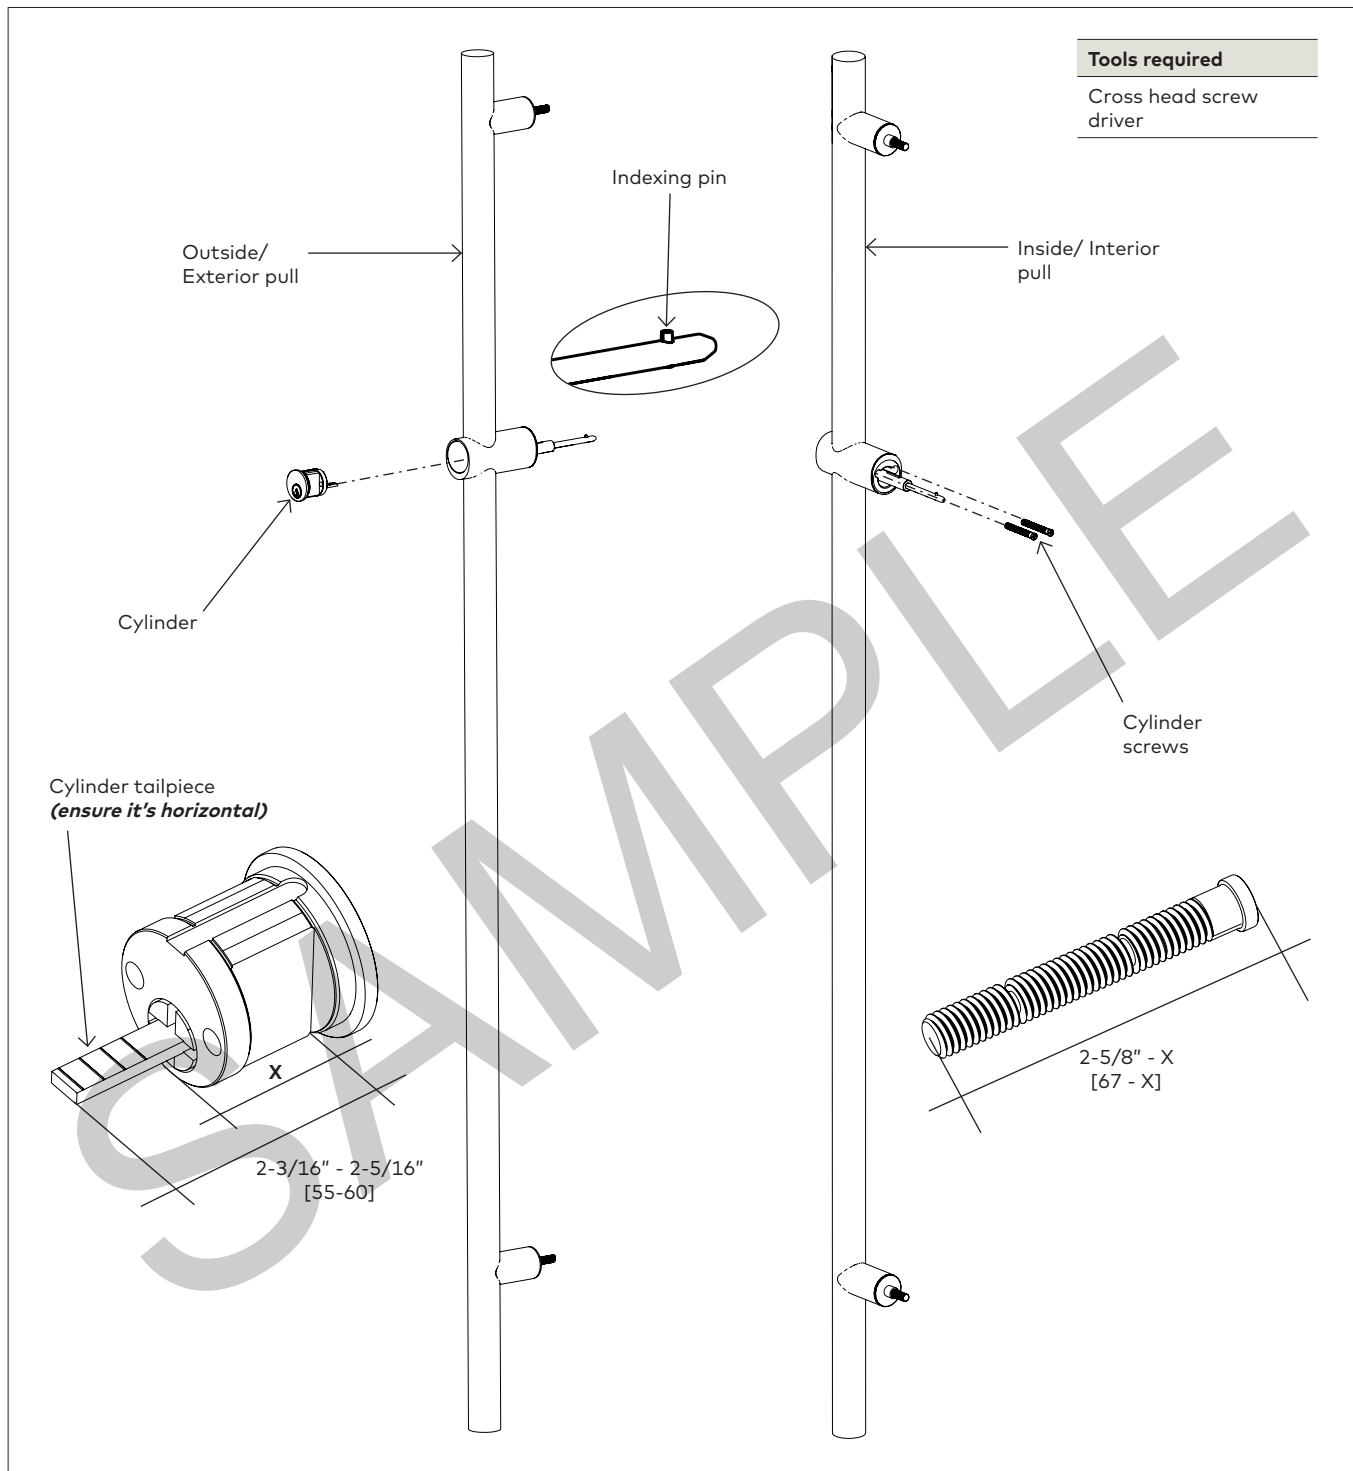

2.4.1 Measure and cut cylinder tail piece to appropriate length.

2.4.2 Install cylinder into outside pull.

NOTE: Ensure indexing pin is pointing upwards.

NOTE: Ensure tailpiece is horizontal and engages with locking mechanism.

2.4.3 Measure and cut included cylinder screws to appropriate length.

• $Length = 2\frac{5}{8}'' - X [67 - X]$

2.4.4 Secure cylinder with screws.