


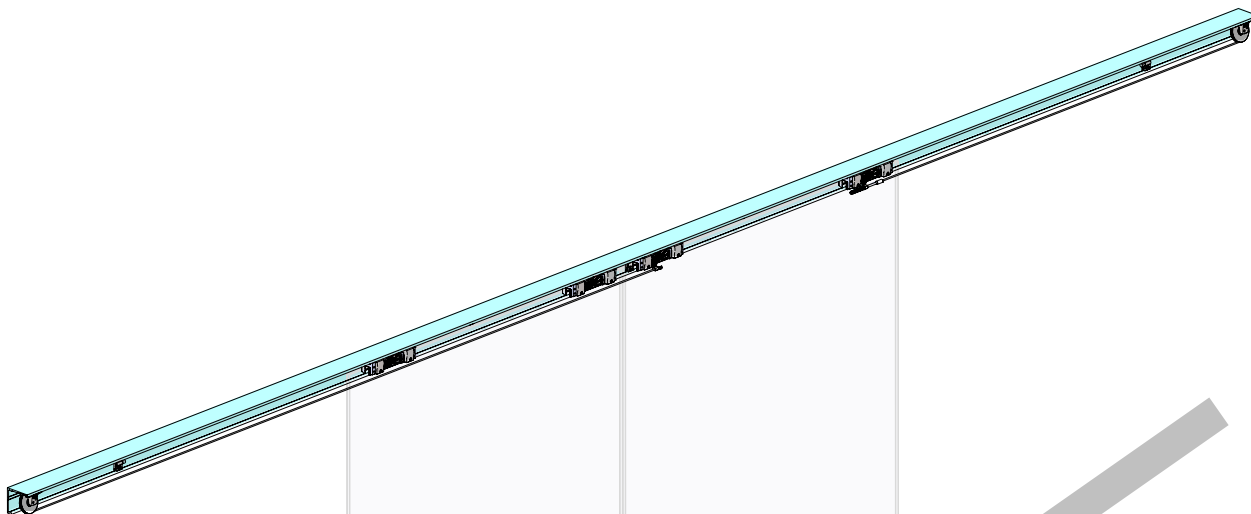

Sliding door systems for wood doors

Installation instructions

– 05-2018

| EN |


1.2 Specifications - technical data

Double Door			
Ceiling mount	Door leaf weight lbs [kg]*	2 x ≤330lbs [2 x ≤150]	2 x <176lbs [2 x ≤80]
	* Including weight of auxiliary hardware.		

2 Installation instructions

2.1 Overall


Fig. 1

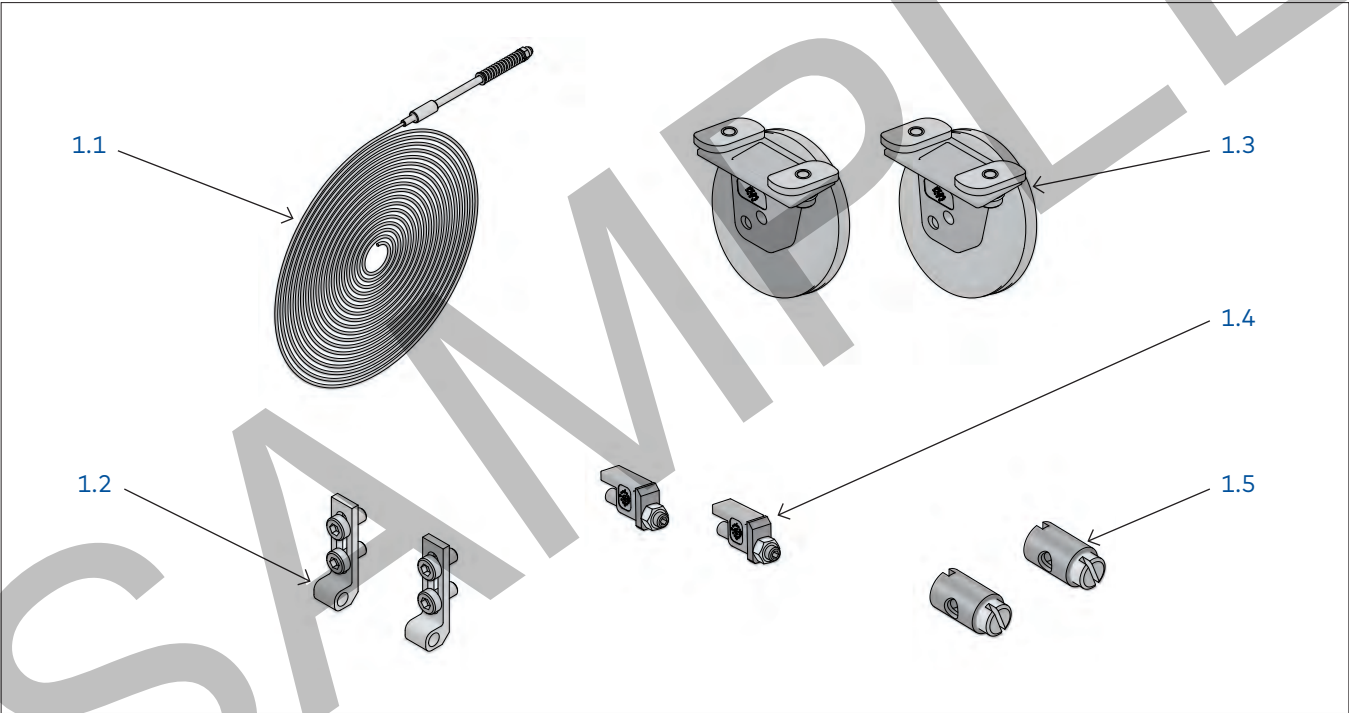

- 1.1 Cable
- 1.2 Cable height guides
- 1.3 Wheels
- 1.4 Cable clamps
- 1.5 Cable locking clamps

2.2 Install track wheels

Fig. 2

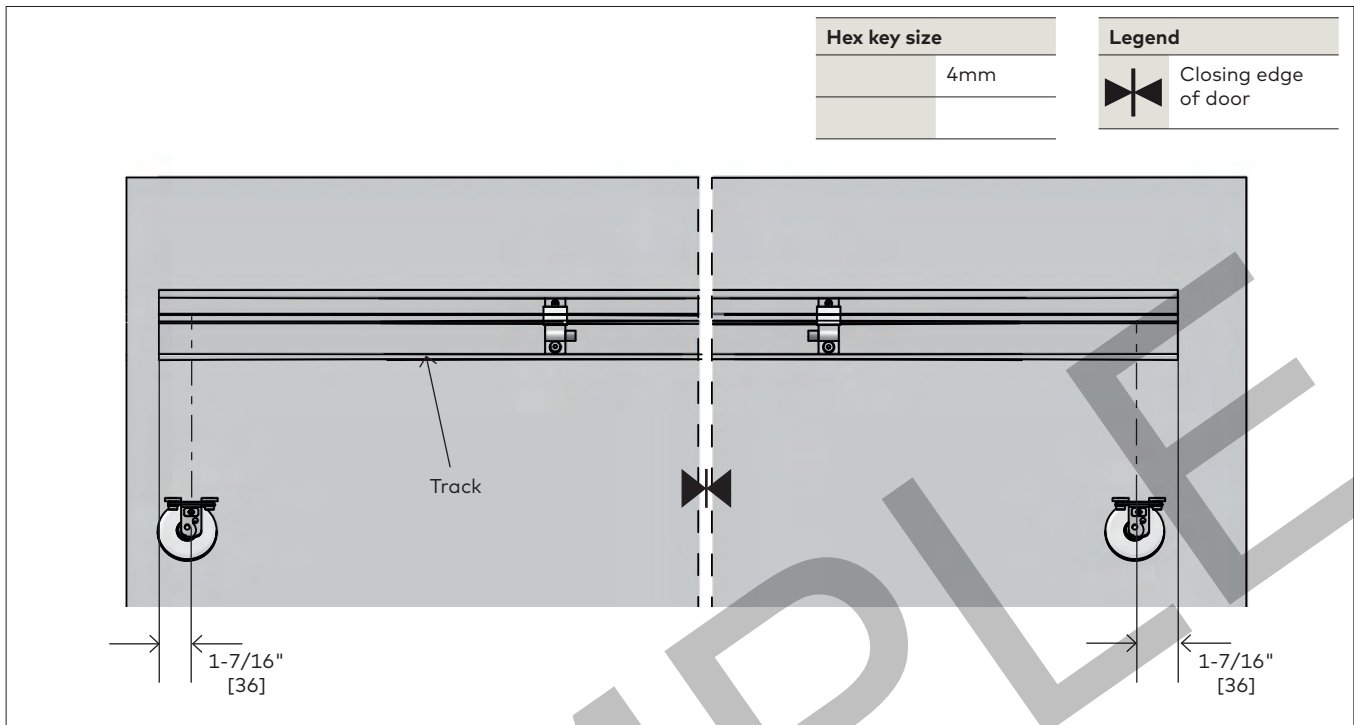

2.2.1 Place wheels toward ends of track.

2.2.2 Move to correct position.


2.2.3 To engage plates, rotate inside track.

2.2.4 Tighten screws.

- Use 4mm hex key at 2.2 ft lbs [3Nm] of force.

2.3 Install cable height guides

Fig. 3

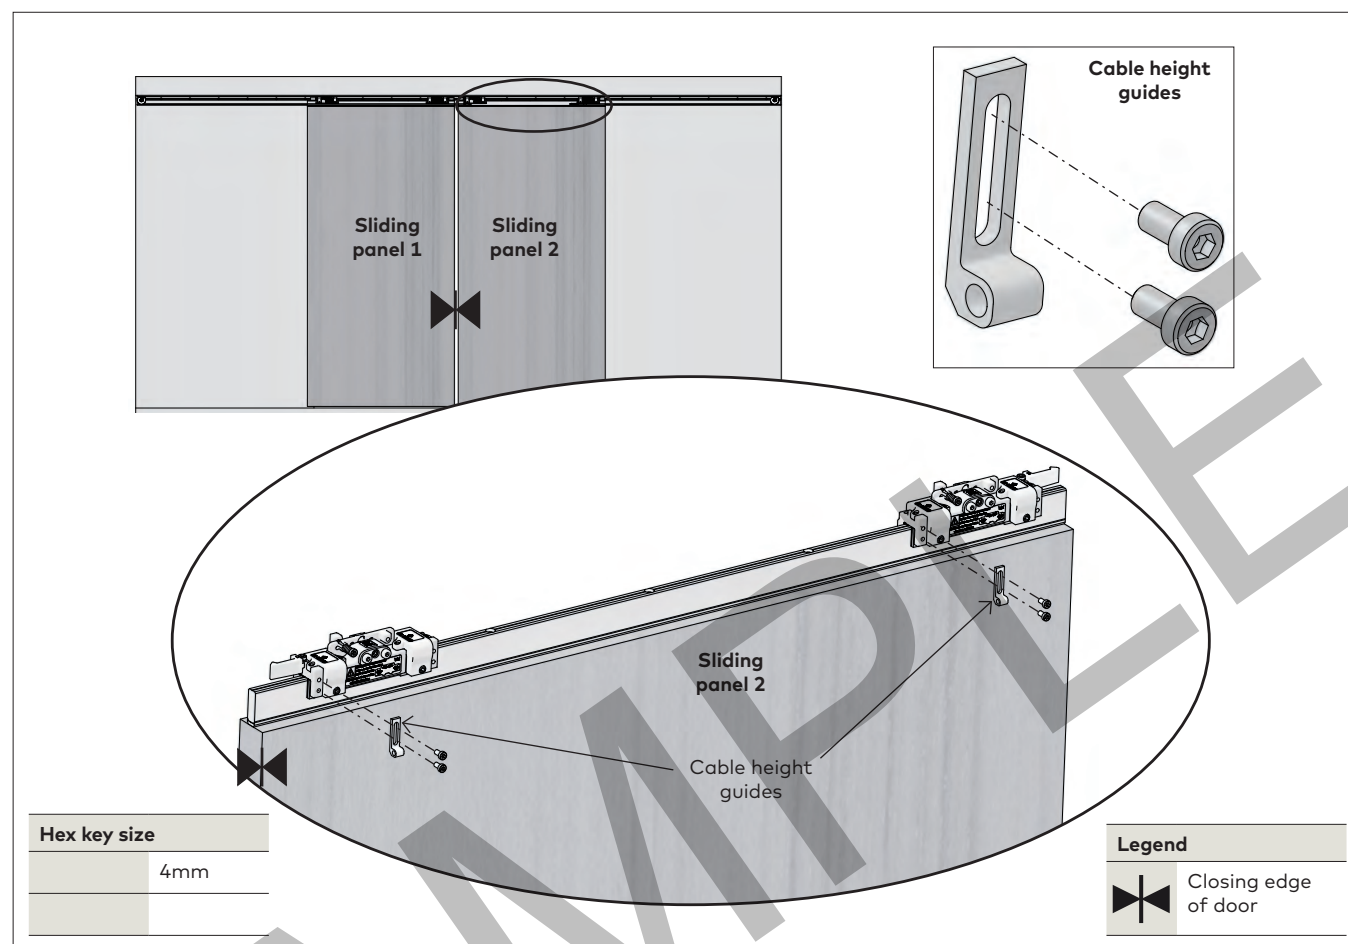


2.3.1 Loosely secure cable height guides to ends of carriers.

- Secure on side of carrier closest to closing edge of door.

2.4 Install cable clamps

Fig. 4

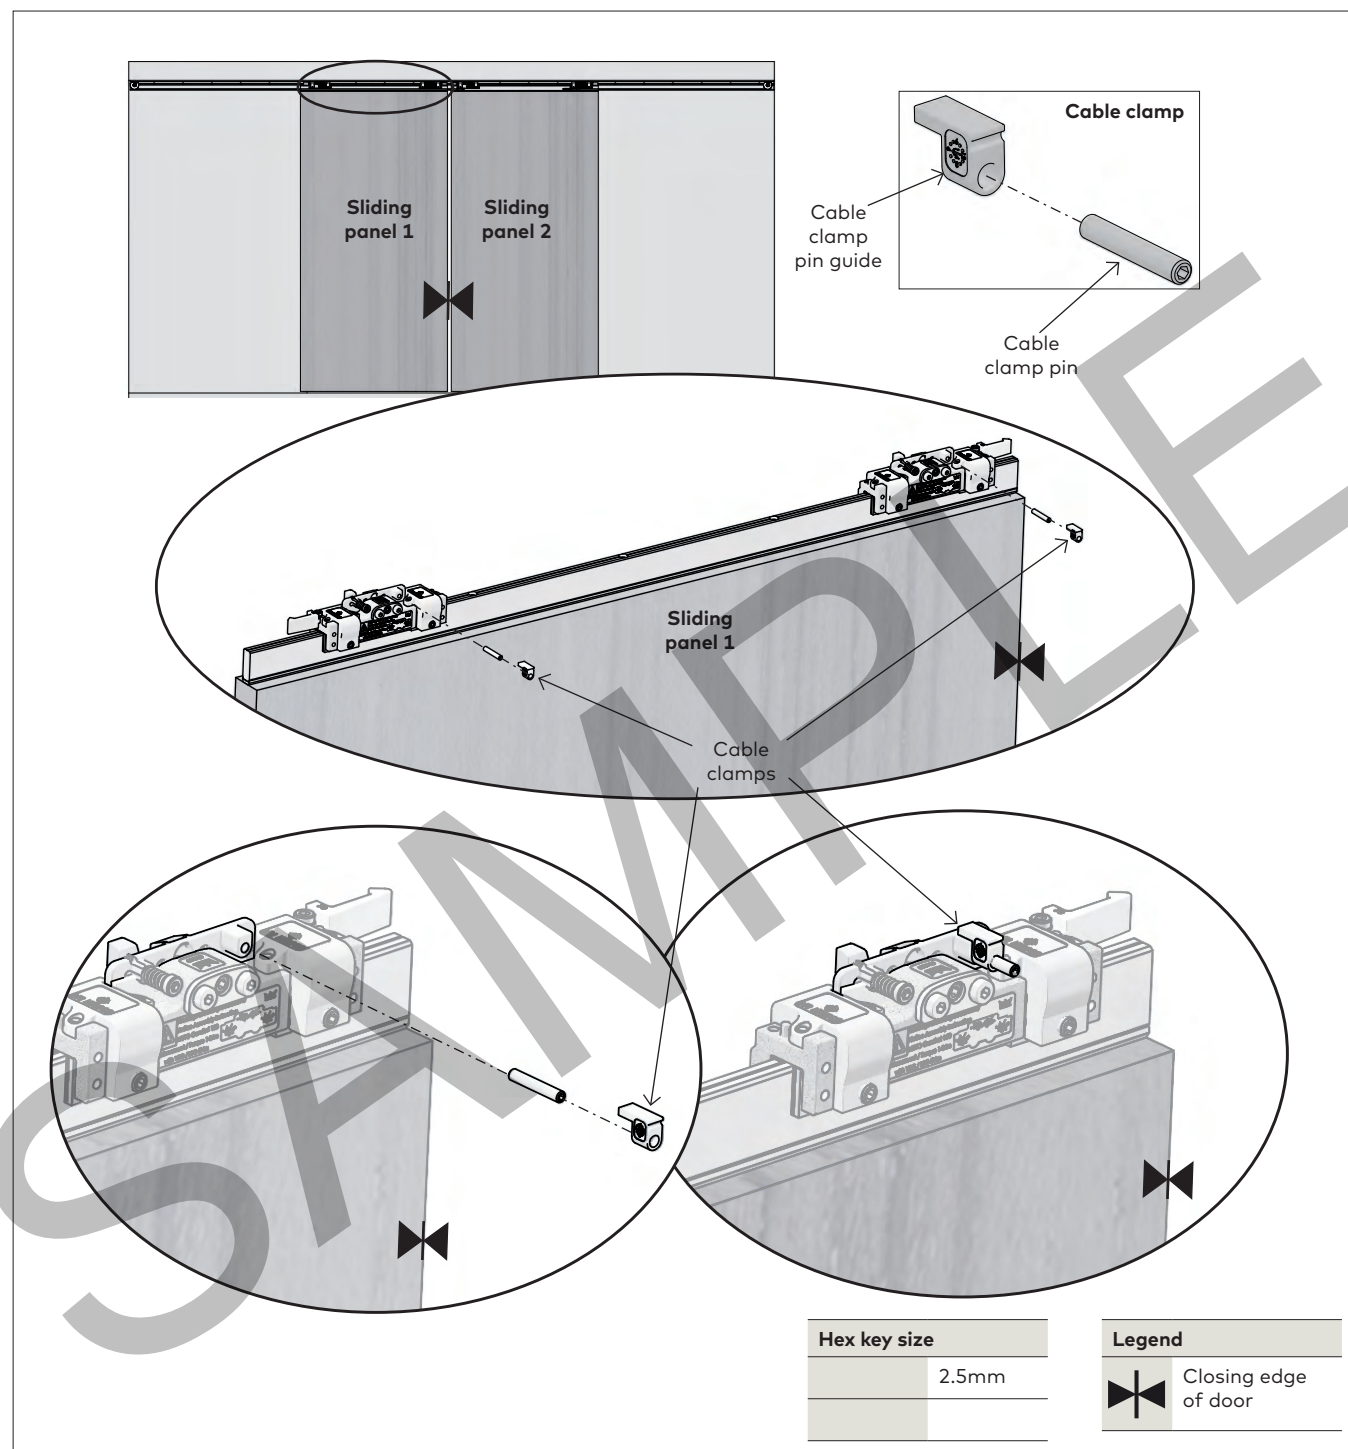


2.4.1 Secure cable clamp pin and cable clamp pin guide into carrier as shown.

Secure on side of carrier closest to closing edge of door.

2.5 Install cable

Fig. 5

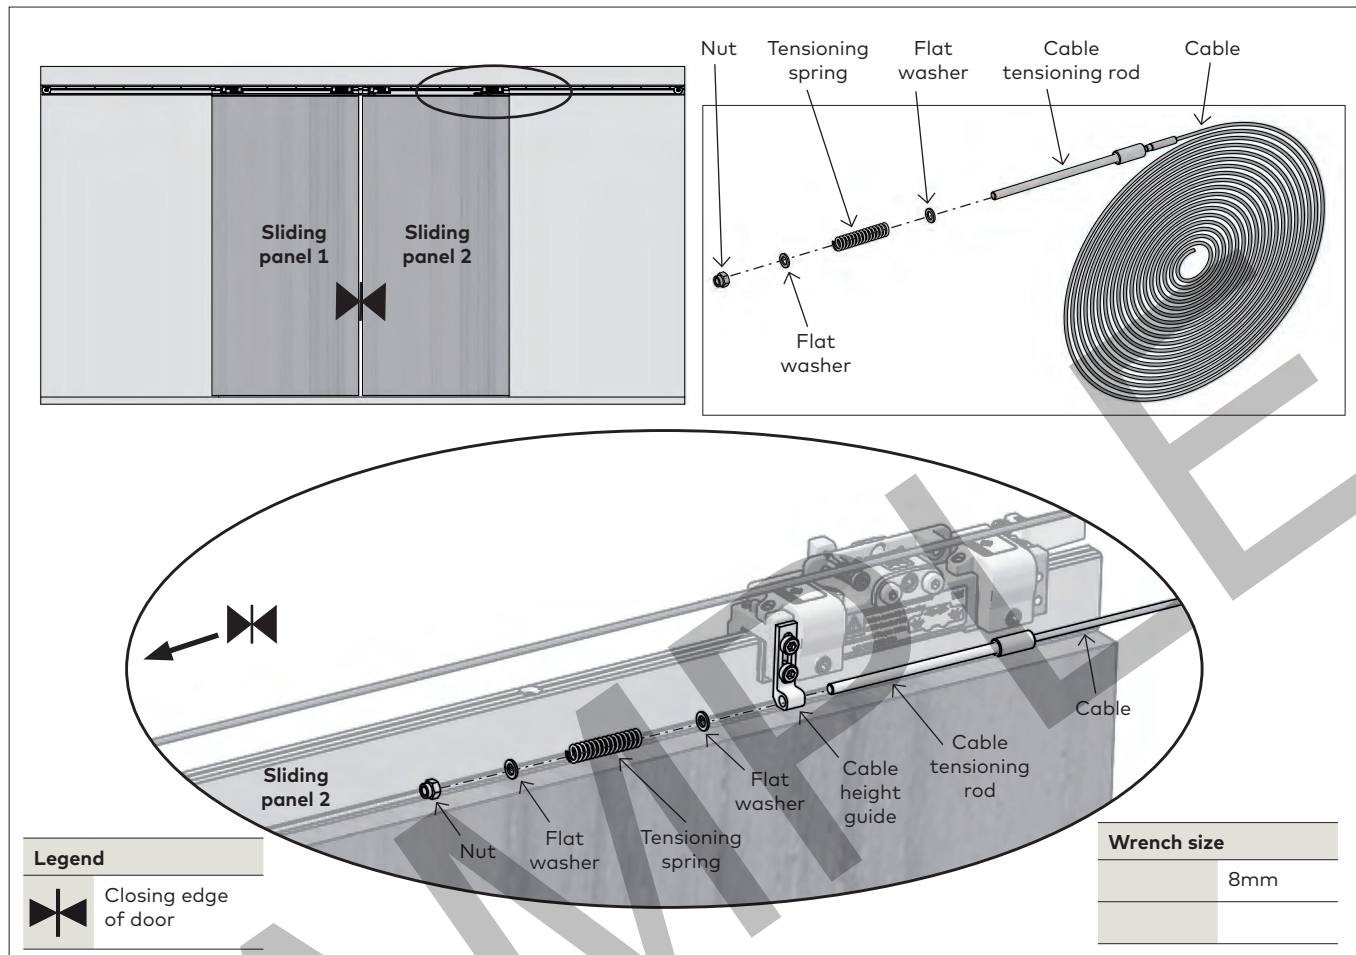

- 2.5.1 Disassemble cable and tensioning spring parts.
 2.5.2 Place felt grease/lubricant onto cable tensioning rod.
 2.5.3 Thread rod through cable height guide as shown.

- 2.5.4 Secure spring to rod in the following order:
- **Nut - Flat washer - Spring - Flat washer - Guide**
 - Use an 8mm wrench to tighten nut.